

1566-ALT Protective Helmet

Thanks to its automatic adjustment mechanism, it fits perfectly on the user's head and features 6 separate fastening points to enhance safety. For comfort during extended use, it is equipped with a textile lining and a durable nubuck sweatband. These features ensure compliance with occupational safety standards while prioritizing the comfort of the wearer.

Short Visor
The short visor provides a wider field of view.




Technical Specifications

Adjustment	Mechanism
Material	ABS
Size Range	53-63 cm
Temperature Range	-10°C / +50°C
Weight	388gr
Carton content	30 Pieces
Standartlar	EN 397:2012 +A1:2012 EN 50365:2002 (CLASS 0) t




STARLINE

1566-ALT Protective Helmet

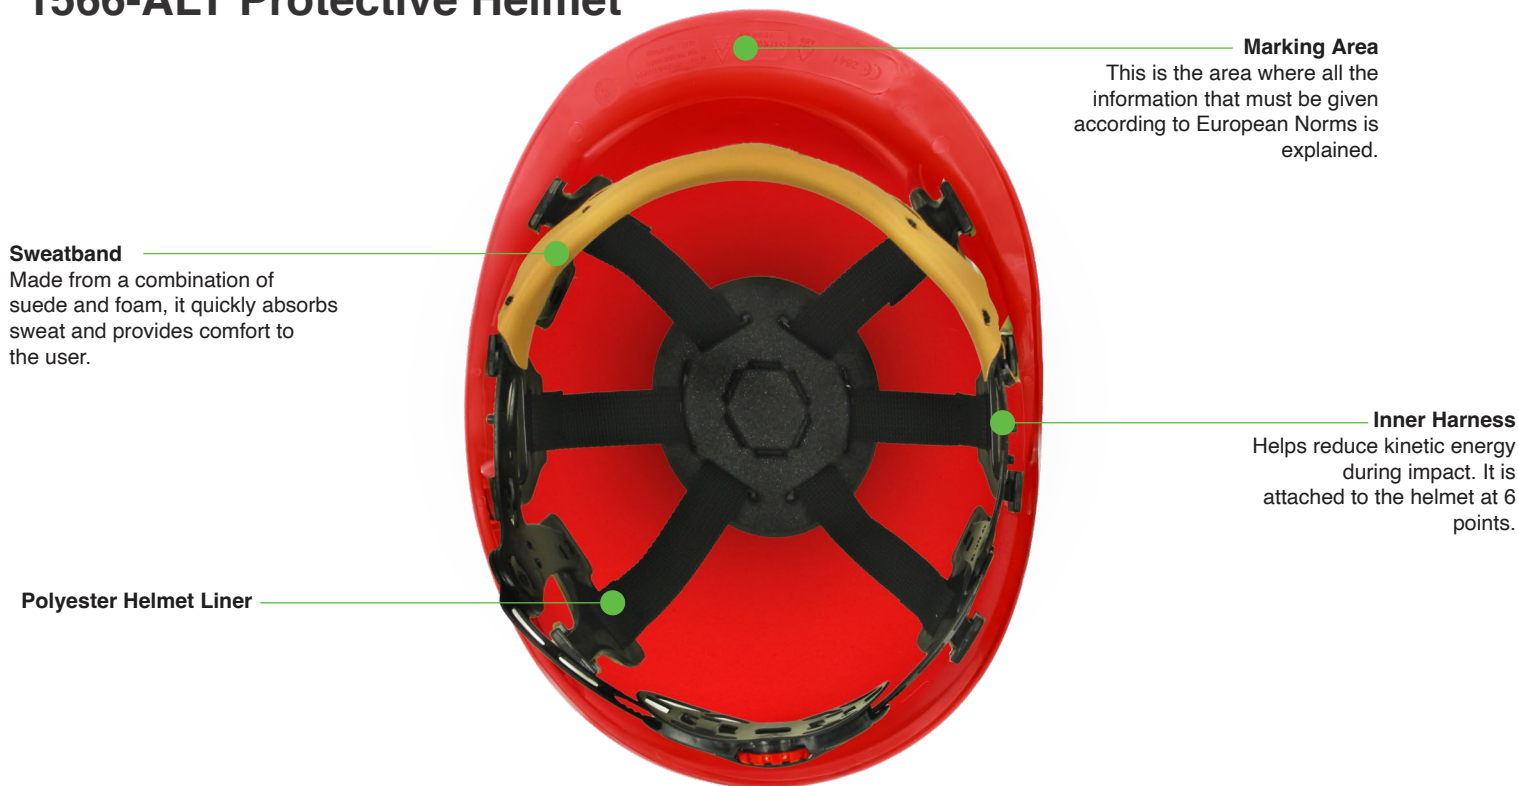


STANDARD DESCRIPTIONS

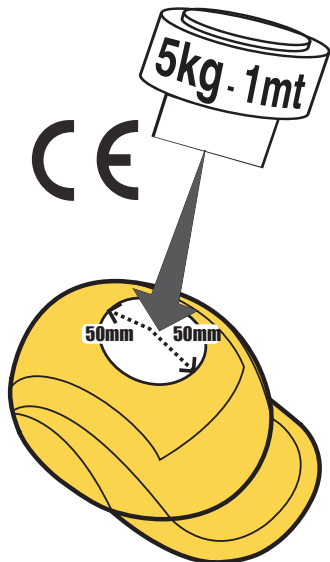

EN 397:2012 +A1:2012

This European Standard specifies physical and performance requirements for industrial safety helmets. Industrial safety helmets are intended primarily to provide protection to the wearer against falling objects and consequential brain injury and skull fracture.

The force of the 5 kg mass dropped from a height of 1 meter transmitted to the headform is not higher than 5,0 kN in the safety helmets fulfilling EN 397 standard. Edge of the 3 kg mass fallen does not contact with the surface of the headform "(skull). Body materials do not burn due to the flame effect 5 seconds after the flame is removed.



EN 50365

EN 50365:2002 (CLASS 0)

It is a standard applicable to electrically insulated helmets used in low-voltage installations. This standard specifies the requirements for helmets intended for use in working conditions where there is a risk of contact with high-voltage electricity (1000 Vac (Alternating Current) or 1500 Vdc (Direct Current)). It covers a higher-level test than the optional electrical resistance tests specified in EN 397:2013 and EN 812:2012, with a test voltage of 10,000 volts.

STARLINE



Maintenance and Cleaning

The protective safety helmet should be preserved in a clean place and regularly cleaned with warm water and/or only a mild detergent. Surface can be cleaned with a soft brush. Abrasive materials or solvents should not be used in cleaning the safety helmet and should be preserved without being exposed to direct sunlight or contacting with solvents. Examination should be daily carried out whether any cracking, breakage or any physical damage has occurred or not. Accessories should be changed with the original parts of the manufacturer.



Service life

Industrial safety helmet should be changed once every three years as of the manufacturing date. Accessories are recommended to be renewed every two years. Service life of the safety helmet is affected by several factors such as cold, hot, chemicals, sunlight and misuse.



Storage

Storage is a part of the maintenance and cleaning but are often ignored. A safety helmet should be stored in its original packaging which will keep it away from direct sunlight, chemicals and abrasive materials and protect it against physical damages of the hard surfaces or materials when not used or during shipment.

Order Information

MODEL	Product	 Barcode	Carton Content	 Dimension	 Weight
1566-ALT - Red	Helmet	8680907006002	30 pcs	47x57x59 cm	14.00 kg
1566-ALT - Yellow	Helmet	8680907005999	30 pcs	47x57x59 cm	14.00 kg
1566-ALT - White	Helmet	8680907005982	30 pcs	47x57x59 cm	14.00 kg