

9050 Safety Helmet

The polyester inner part absorbs the shock and is made of ABS. The neck band can be adjusted according to the different size of head. In addition, ventilation is provided thanks to the front micro holes.



Technical Specifications

Belt Material	Polyamide (Textile)
Adjustment	Automatic
Material	ABS
Size Range	54-62 cm
Temperature Range	10°C / +50°C
Weight	297gr.
Carton content	6 pieces
Standards	EN 397:2013 +A1:2013



STARLINE

● Helmet Details



● Printing Surface Sizes

	↔	↕
1	70mm	50mm
2	150mm	65mm


*Sizes specify the maximum surface on which labels will be imprinted. In case of common usage of several additional apparatuses, surface sizes on which the labels could be fastened may be narrowed.

WARNING: The applied label may make difficult to detect physical damage that may occur over time. It is recommended to keep the label as small as possible.



STARLINE

EN 397:2013 +A1:2013

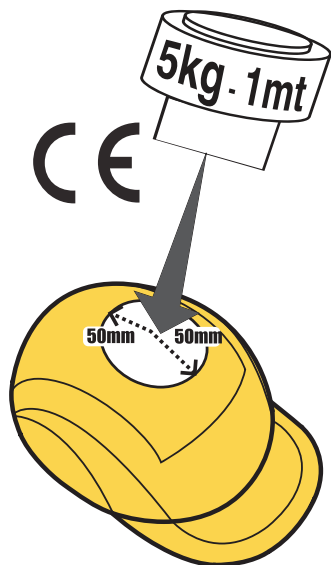

This European Standard specifies physical and performance requirements for industrial safety helmets. Industrial safety helmets are intended primarily to provide protection to the wearer against falling objects and consequential brain injury and skull fracture.

The force of the 5 kg mass dropped from a height of 1 meter transmitted to the headform is not higher than 5,0 kN in the safety helmets fulfilling EN 397 standard. Edge of the 3 kg mass fallen does not contact with the surface of the headform "(skull). Body materials do not burn due to the flame effect 5 seconds after the flame is removed.

User Guide



Maintenance and Cleaning

The protective safety helmet should be preserved in a clean place and regularly cleaned with warm water and/or only a mild detergent. Surface can be cleaned with a soft brush. Abrasive materials or solvents should not be used in cleaning the safety helmet and should be preserved without being exposed to direct sunlight or contacting with solvents. Examination should be daily carried out whether any cracking, breakage or any physical damage has occurred or not. Accessories should be changed with the original parts of the manufacturer.



Service life

Industrial safety helmet should be changed once every three years as of the manufacturing date. Accessories are recommended to be renewed every two years. Service life of the safety helmet is affected by several factors such as cold, hot, chemicals, sunlight and misuse.



Storage

Storage is a part of the maintenance and cleaning but are often ignored. A safety helmet should be stored in its original packaging which will keep it away from direct sunlight, chemicals and abrasive materials and protect it against physical damages of the hard surfaces or materials when not used or during shipment.

Order Information

MODEL	Product	Barcode	Box Dimension	Box Weight
9050 / White	Helmet	8680907005791	72 x 27 x 38cm	3.00kg.
9050 / Yellow	Helmet	8680907005807	72 x 27 x 38cm	3.00kg.