
STARLINE

Data Sheet

D Model Rubber Gloves

This glove is a Category II protective glove designed to provide hand protection in working environments where mechanical risks are present. The long cuff design and textured grip surface provide secure grip and handling, particularly in wet and oily working environments.



Grip Texture
The textured surface structure supports grip performance in wet and oily environments.



Glove Material
Made of rubber material that prevents liquids from penetrating.

Curved Cuff
The curved end of the glove makes it easier to put on and take off.


Marking Area
It is indicated on the front of the glove. It contains all the information required according to European standards.

Technical Specifications

Inner Layer	Orange Rubber
Outer Layer	Black Rubber
Thickness	0.50 mm
Length	34cm
Sizes	9/L, 10/XL
Carton Quantity	120 Pairs
Packaging	1 Pair
Category	CAT II
Standards	EN 388:2016+A1:2018 (1000X) EN ISO 21420:2020+A1:2024

STARLINE

GLOVE TEXTURE and LINING INFORMATION

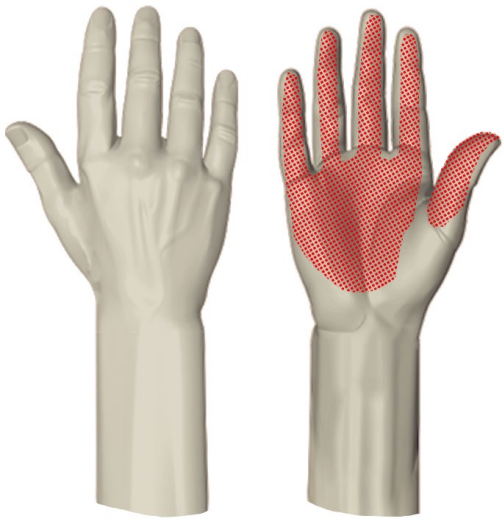

Glove Texture

GLOVE TEXTURE

The textured grip surface is designed to support grip performance in wet and oily working conditions.

RUBBER LINING

The orange rubber lining makes the glove easy to put on and take off, providing comfortable use.

STANDARDS

These gloves are designed to protect the hands against mechanical hazards as defined in PPE Regulation (EU) 2016/425. This product has been tested in accordance with EN ISO 21420:2020+A1:2024 (Protective Gloves – General Requirements and Test Methods) and EN 388:2016+A1:2018 (Protective Gloves Against Mechanical Risks).

EN 388:2016 +A1:2018

1000X

EN ISO 21420 :2020+A1:2024

CE

Areas of Usage

- Wood
- Construction and Building
- Automotive and Transportation
- Metal Production
- Machinery and Equipments
- Logistics and Warehousing

Suitable for use in the manufacture of wood, wood products and cork products; paper and paper products; iron, steel and metal products; general-purpose machinery; transportation equipment such as aircraft, railway and automotive; building and non-building construction; transportation and storage operations; and mechanical applications.

STARLINE

STANDARD REMARKS

EN 388:2016 +A1:2018



a b c d e f

EN 388:2016+A1:2018 Protective Gloves Against Mechanical Risks

This standard covers the requirements and test methods for protective gloves against mechanical risks such as abrasion, cut, tear, and puncture.

FEATURES:

Protective gloves conforming to this standard shall meet all applicable requirements of EN ISO 21420. The performance level of a protective gloves against mechanical risks shall be classified according to the minimum requirements of each level shown in the table below and shall achieve a higher performance level for at least one of the following properties: abrasion, cut, tear, puncture, and impact protection.


Note – Gloves meeting the requirements for puncture resistance may not be suitable for protection against sharp-pointed objects such as hypodermic needles.

The letter **X** indicates that the test was not performed or is not applicable.

PERFORMANCE LEVELS	1	2	3	4	5
a - Abrasion resistance (number of cycles)	100	500	2000	8000	-
b - Cut resistance (index)	1,2	2,5	5,0	10,0	20,0
c - Tear resistance (N)	10	25	50	75	-
d - Puncture resistance (N)	20	60	100	150	-

PERFORMANCE LEVELS	A	B	C	D	E	F
e - Cut resistance (N)	2	5	10	15	22	30
f - Impact protection	Pass (P) / Fail (No marking)					

EN ISO 21420 :2020+A1:2024



EN ISO 21420:2020+A1:2024 General Requirements and Test Methods

This standard specifies the general requirements for the design, construction, protection against hazards, comfort, effectiveness, marking, and information applicable to all protective gloves. This standard also applies to arm protectors. Some gloves designed for highly specific applications, such as those used by electrical technicians or for surgical activities, are governed by specific and more stringent standards.

GLOVE SIZE	Suitable for Hand Size	Hand Circumference / Length	Min. Glove Length
6	6	152/160 mm	220 mm
7	7	178/171 mm	230 mm
8	8	203/182 mm	240 mm
9	9	229/192 mm	250 mm
10	10	254/204 mm	260 mm
11	11	279/215 mm	270 mm

** For more detailed information on Standards, you can obtain **EN European Glove Standards Guidelines** from www.starlinesafety.com.*

STARLINE

USER MANUAL

Maintenance and Cleaning

The gloves are not washable. Clean only by wiping. Gloves that become unusable due to damage, contamination, or other unsafe conditions must be disposed of in a manner that prevents reuse and in accordance with local regulations. Do not attempt to repair the gloves.

Service Life

The shelf life of the protective gloves is 4 years when properly stored (unused). The service life of the gloves is affected by many factors, such as cold, heat, chemicals, sunlight, and improper storage.

Storage

The products should be stored in their original packaging, protected from sunlight, artificial light, and moisture, at temperatures between 5°C and 25°C. After use, the gloves should be kept in a clean, dry, and well-ventilated area, away from direct sunlight, tools, and other sharp objects.

Sipariş Bilgisi

MODEL	Size	Barcode	Box Quantity	Box Dimensions	Box Weight
D Model	L	8680907974646	120 Pairs	37 x 31 x 27cm	14.00 kg
D Model	XL	8680907928281	120 Pairs	37 x 31 x 27cm	14.50 kg