

Driver-Y Leather Gloves

The palm and back of the hand are made of leather and produced without lining. It is designed for use in low-risk tasks that require good grip.

Palm and Back of Hand Material

To increase the glove's durability, cowhide leather is used on the palm and back of the hand.



Marking Area

It contains all the information required according to European standards.

Elastic Cuff


This section is made with elastic to ensure the glove fits securely around the wrist.

Technical Specifications

Palm Material*	Cowhide Leather
Back of HandMaterial*	Cowhide Leather
Lining Material	-
Sizes	10/XL
Carton Quantity	72 Pairs
Packaging	1 Pairs
Category	CAT II
Standards	EN 388:2016+A1:2018 (2X11X) EN ISO 21420: 2020

STARLINE

REINFORCEMENT AREA and LINING INFORMATION

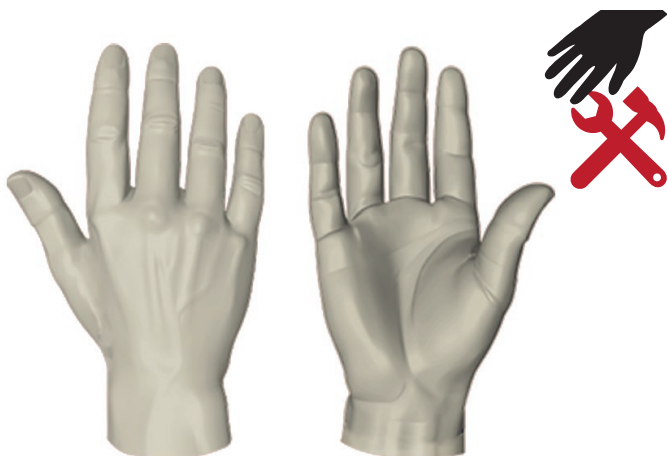

REINFORCEMENT AREA

Driver-Y gloves are sewn as a single piece. There is no reinforcement on the palm or fingers.

LINING

These gloves are manufactured without lining.

 Indicates the reinforcement area.

STANDARDS

These gloves are designed to protect hands against mechanical hazards as defined in the PPE Regulation (EU) 2016/425. This product has been tested in accordance with EN ISO 21420 (General requirements and test methods for protective gloves) and EN 388 (Protective gloves against mechanical risks).

EN388:2016
+A1:2018



2X11X

EN ISO 21420:
2020



Applications



Automotive and Transportation



Cleaning



Automotive and Transportation

Suitable for simple mechanical tasks in many industries. It is suitable for use only in low-risk applications such as assembly operations, packaging processes, handling, and lifting.

STARLINE

STANDARD REMARKS

EN 388:2016 EN 388:2016+A1:2018 Protective Gloves for Mechanical Risks



a b c d e f

This standard covers features and test methods for protective gloves against mechanical risks such as abrasion, cutting, tearing, puncturing.

FEATURES:

Protective gloves conforming to this standard must meet all applicable properties of EN ISO 21420. The performance level of a protective glove against mechanical risks should be at a higher level for one of the attributes (wear, knife cutting, tearing, puncture and impact protection) that are classified according to the least features of each level shown in the table below.

Note - Gloves that meet the specifications for puncture resistance may not be suitable for protection against sharp-pointed objects such as hypodermic needles.

The letter **X** means that the test has not been done or can not be performed.

PERFORMANCE LEVELS	1	2	3	4	5
a - Abrasion resistance (number of cycles)	100	500	2000	8000	-
b - Cut resistance (index)	1,2	2,5	5,0	10,0	20,0
c - Tear resistance (N)	10	25	50	75	-
d - Puncture resistance (N)	20	60	100	150	-

PERFORMANCE LEVELS	A	B	C	D	E	F
e - Cut Resistance (N)	2	5	10	15	22	30
f - Protection Against Impact	Pass (P) / Failed (No sign)					

EN ISO 21420:2020



EN ISO 21420 General Specifications and Test Methods

This standard specifies the general requirements for the glove design and construction, protection against hazards, comfort, efficiency and marking and information applicable to all protective gloves. This standard also applies to arm protections.

Many gloves designed for electrical technicians or the most private applications such as surgical operations are governed by private and strict standards.

GLOVE SIZE	Fits Hand Size	Hand Circumference / Length	Minimum Glove Length
6	6	152/160 mm	220 mm
7	7	178/171 mm	230 mm
8	8	203/182 mm	240 mm
9	9	229/192 mm	250 mm
10	10	254/204 mm	260 mm
11	11	279/215 mm	270 mm

* For more detailed information on Standards, you can obtain **EN European Glove Standards Guidelines** from www.starlinesafety.com.

STARLINE

USAGE INFORMATION



Maintenance and Cleaning

We recommend you to clean gloves by a brush made of synthetic materials. Glove cleaning should not be carried out through rigid and tearing materials. It should be never washed by hand or in the washing machine. It is the responsibility of user to control whether glove is suitable for intended use or not, whether it is complete or not and whether protective functions are undamaged or not. User should carry out an examination against potential defects which are likely to adversely affect protection functions (punctures, tears, damaged seams, etc.).



Service Life

Gloves should be used within five years as of the manufacture date. Service life of the gloves is affected by several factors such as cold, hot, chemicals, sunlight and inadvisable storage.



Storage

Storage is a part of the maintenance and cleaning but is often ignored. Protective gloves should be stored in their original packaging which will keep them away from direct sunlight, chemicals and abrasive materials and protect them against physical damages of the hard surfaces or materials when it is not used or during shipment. Product should be stored in a dry and well-ventilated place. Availability of excessive humidity or intense light may adversely affect the product quality.

Order Information

MODEL	Size	Barcode	Box Quantity	Box Dimesion	KG Box Weight
Driver-Y	10 / XL	8680907012164	72 Pairs	26 x 38 x 27 cm	9,20 kg